

T9GS5L24-18 ✓ ACTIVE

Potter & Brumfield | Potter & Brumfield T9G

TE Internal #: 1558675-5

Power Relays, Standard, Monostable, DC, 900 mW Coil Power Rating DC, 360 Ω Coil Resistance, UL Coil Insulation Class F, Potter & Brumfield T9G

[View on TE.com >](#)



Relays & Contactors > Relays > Power Relays > PCB Power Relay: 30 amp, Monostable DC



Relay Type: **Standard**

Coil Magnetic System: **Monostable, DC**

Coil Power Rating DC: **900 mW**

Coil Resistance: **360 Ω**

Coil Special Features: **UL Coil Insulation Class F**

[All PCB Power Relay: 30 amp, Monostable DC \(108\)](#)

Features

Product Type Features

| | |
|------------|----------|
| Relay Type | Standard |
|------------|----------|

Configuration Features

| | |
|-------------------------|----------------------------|
| Coil Special Features | UL Coil Insulation Class F |
| Contact Arrangement | 1 Form C (CO) |
| Contact Number of Poles | 1 |

Electrical Characteristics

| | |
|---|--------------|
| Insulation Initial Dielectric Between Open Contacts | 1500 Vrms |
| Insulation Initial Dielectric Between Contacts & Coil | 4000 Vrms |
| Coil Power Rating DC | 900 mW |
| Coil Resistance | 360 Ω |
| Coil Voltage Rating | 18 VDC |
| Contact Current Rating | 20 A |



| | |
|---------------------------------|-------------|
| Contact Switching Load (Min) | 100mA @ 12V |
| Contact Switching Voltage (Max) | 480 VAC |
| Contact Voltage Rating | 250 VAC |

Body Features

| | |
|----------------|---------------|
| Product Weight | 23 g[.812 oz] |
|----------------|---------------|

Contact Features

| | |
|------------------|-------|
| Contact Material | AgSnO |
|------------------|-------|

Termination Features

| | |
|------------------------|----------------------------|
| Relay Connection Type | PCB Termination, Terminals |
| Terminal Configuration | Quick Connect Terminals |

Mechanical Attachment

| | |
|-------------------------------|-----------------------|
| Product Mounting Feature Type | Locating Post |
| Product Mount Type | Printed Circuit Board |

Dimensions

| | |
|----------------|----------------|
| Product Width | 25 mm[.984 in] |
| Product Length | 32 mm[1.26 in] |
| Product Height | 27 mm[1.06 in] |

Usage Conditions

| | |
|---|-------------------------------|
| Environmental Ambient Temperature (Max) | 105 °C, 85 °C[176 °F][221 °F] |
| Operating Temperature Range | -40 - 105 °C |

Operation/Application

| | |
|----------------------|----------------|
| Coil Magnetic System | Monostable, DC |
|----------------------|----------------|

Packaging Features

| | |
|------------------|---------------|
| Packaging Method | Carton & Tube |
|------------------|---------------|

Other

| | |
|---------------------------|----------------------|
| Length Class (Mechanical) | 30 - 35 mm |
| Height Class (Mechanical) | 25 - 30 mm |
| Coil Power Rating Class | 800 - 1000 mW |
| Width Class (Mechanical) | 20 - 25 mm |
| Contact Current Class | 10 - 20 A, 20 - 30 A |



Product Compliance

For compliance documentation, visit the product page on TE.com>

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Wave solder capable to 260°C |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1969656-1
250 FASTON HSG.,FLAG,REC.,1 POS, NATRUAL



TE Part # 1969657-1
250 FASTON HSG.,FLAG,REC.,1 POS, BLACK



TE Part # 2238171-3
250 FASTON,FLAG,REC.,22-12 AWG, TPBR




TE Part # 1969900-1
250 FASTON HSG.,FLAG,REC.,2 POS, NATRUAL





TE Part # 2238270-1
HSG, RECEP, 250 FASTON FLAG, 3P, T9G

Also in the Series | Potter & Brumfield T9G

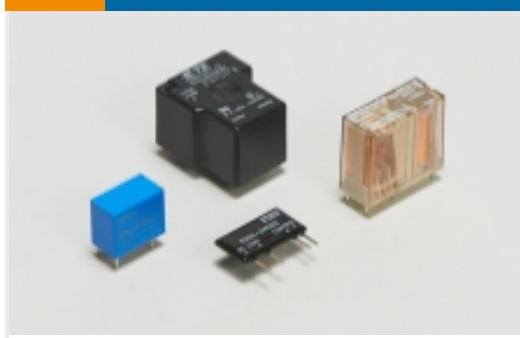

Power Relays(108)

Customers Also Bought

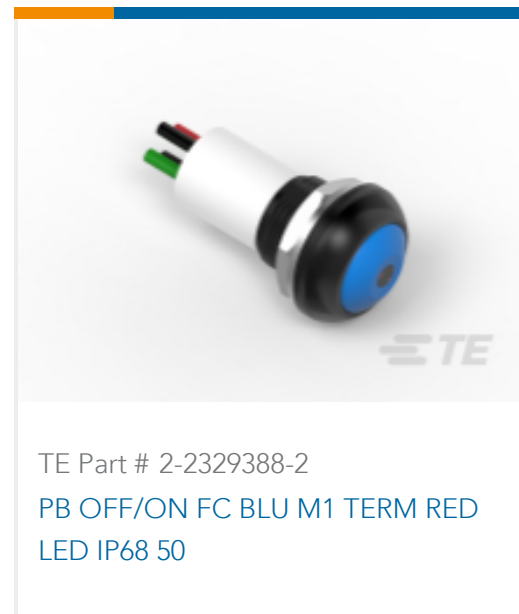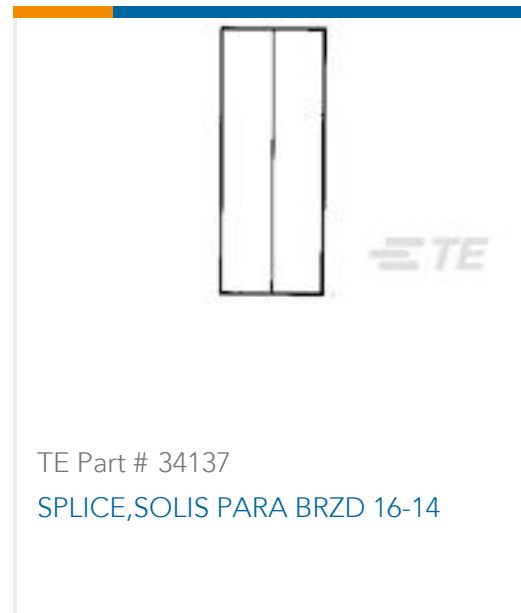

Documents

[CAD Files](#)

[3D PDF](#)

[3D](#)

[Customer View Model](#)

[ENG_CVM_CVM_1558675-5_B.2d_dxf.zip](#)

English



Customer View Model

[ENG_CVM_CVM_1558675-5_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1558675-5_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[PB 30A PCB Relay T9G Series](#)

English

[T9G Data Sheet](#)

English

Product Specifications

[Definitions General Purpose Relays](#)

English

Agency Approvals

[VDE Certificate](#)

English